

XYSTON

Wireless Dual Channel Dimmer XNAPPK DALI-0-10V-PWM-2CH-CAS



Product Features

- 12V–57V input/output range for flexible installation across different LED systems
- 2-channel 0-10V / DALI control for versatile dimming options
- 2-channel PWM dimming for precise lighting control
- Supports up to 6A per channel for high-performance lighting management
- 342W per channel at 57VDC input for efficient and powerful operation
- Casambi Ready for seamless integration with smart lighting systems
- Sensor input for automated, responsive lighting control

Product Specifications

Max. Input Voltage	12-57 VDC
Max. Input Current	6A
Max. Output Voltage	Same as input
Output Power	72W@12VDC / 342W@57VDC
Device Control	2 channels PWM / 2 channels 0-10V / 1 channels DALI (Casambi App)
Cable Length	20cm / 7.9 in
Dimensions	70 x 68 x 27 mm / 2.8 x 2.7 x 1 in
Ambient Temperature, ta	-40°C to 55°C / -40°F to 131°F
Max. Case Temperature, tc	80°C / 176°F
Storage Temperature	-20°C to 85°C / -4°F to 185°F
Max. Relative Humidity	0 to 80%, non-cond.
IP Rating	IP20 (Indoor Use Only)
App	Casambi

XYSTON

Wireless Dual Channel Dimmer

XNAPPK DALI-0-10V-PWM-2CH-CAS


Product Dimensions

Housing Dimensions

Length	70mm / 2.76in
Width	68mm / 2.67in
Height	27mm / 1.06in
Weight	55g

Packaging Details

Packing Units	TBD
Carton Size	TBD
Weight	TBD

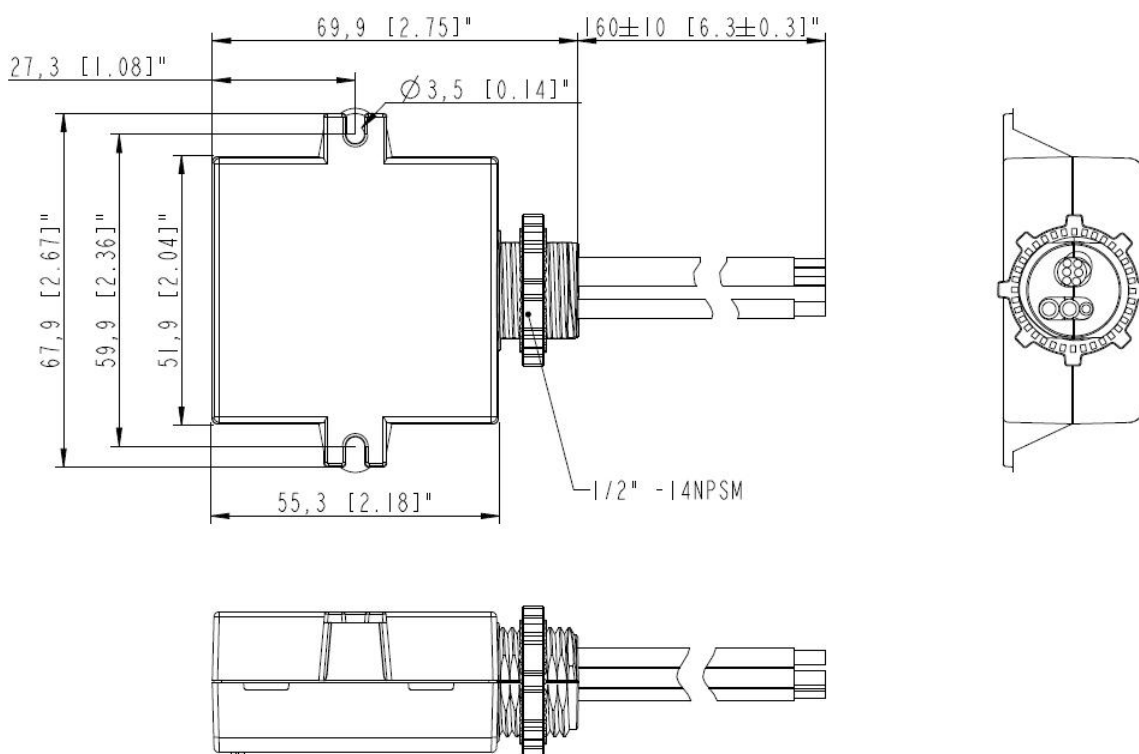


XYSTON

Wireless Dual Channel Dimmer


XNAPPK DALI-0-10V-PWM-2CH-CAS

Wiring Diagram

12-57 VDC LED Strip

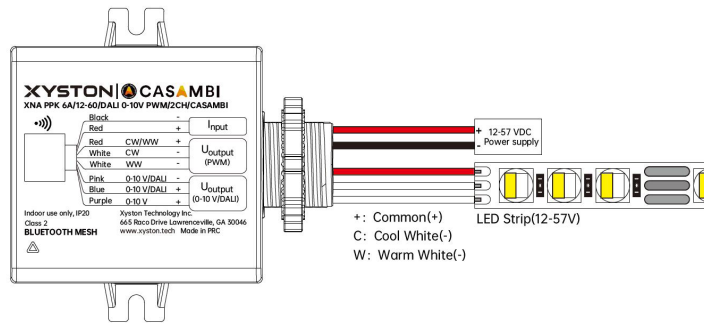

Control DALI Dimmable Drivers

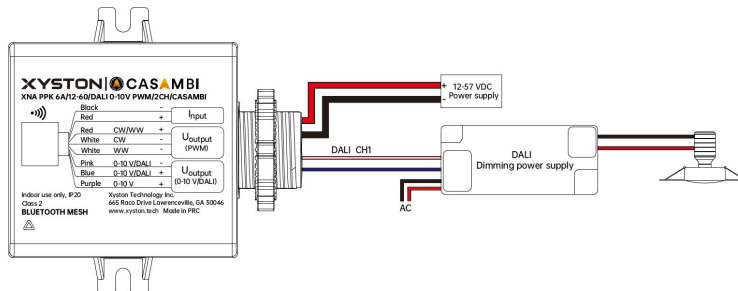

Control 0-10V Dimmable Drivers

